


MGX

RUGGED YET COMPACT DESIGN

Our newest and smallest bench top. Ready to work out-of-the-box, the MGX gives you hands-free accurate measurement results.

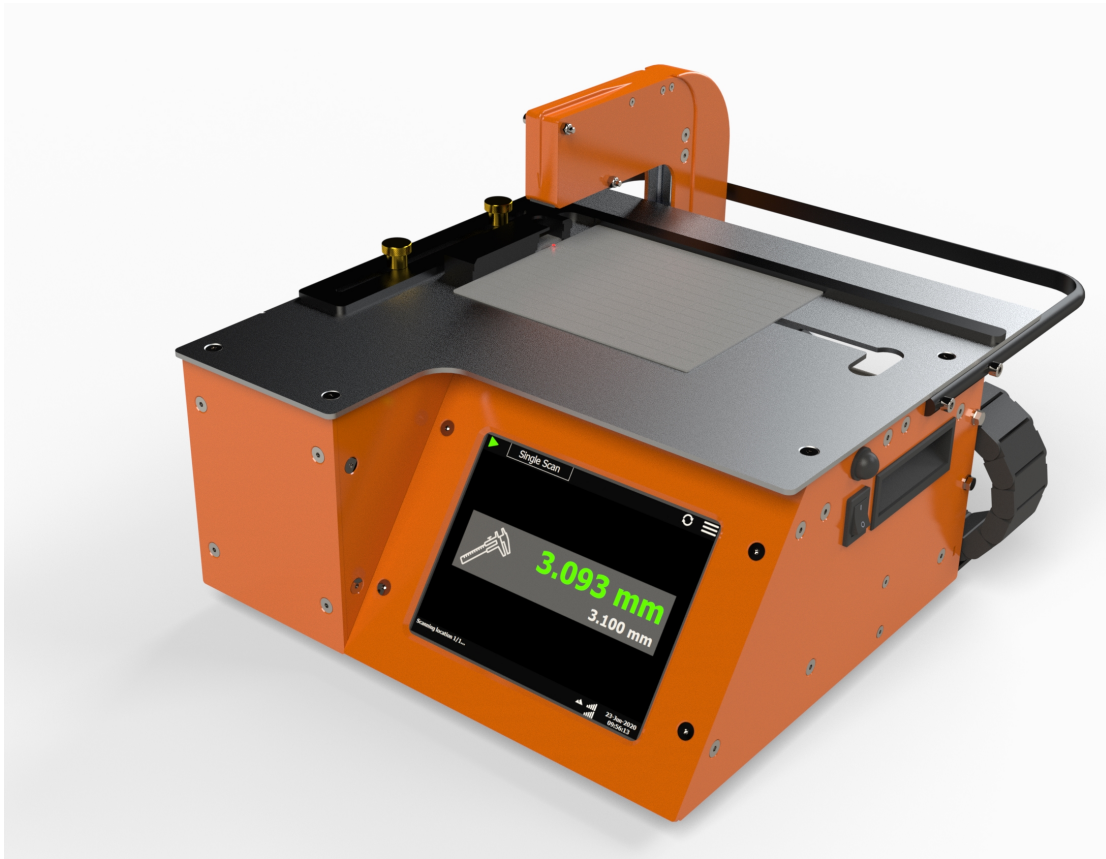

KEY FEATURES

- ✓ NON-CONTACT MEASUREMENT
- ✓ "SCAN CAPTURE" MEASUREMENT MODE
- ✓ REMOTE SUPPORT
- ✓ MINIMAL EXTERNAL CABLING
- ✓ WORKS OUT-OF-THE-BOX
- ✓ DIRT DETECTION AND ALERT SYSTEM
- ✓ SIDE TO SIDE THICKNESS MEASUREMENT
- ✓ PORTABLE
- ✓ DATA LOGGING
- ✓ TOUCHSCREEN DISPLAY
- ✓ NETWORKABLE
- ✓ ON PREMISE WEB APPLICATION
- ✓ PLC COMMUNICATIONS AVAILABLE

WHY CHOOSE THE MGX?

- **Laser measurement for unmatched precision:** Laser sensors measure the thickness of samples. Removes the need to rely on inaccurate hand micrometer measurements and slowing down production with manual product quality checks.
- **Side to side thickness measurement:** Scanning laser heads measure thickness across individual strips. Avoids relying on the outside strips to control your process.
- **PLC Connection:** Engineered to blend seamlessly into your production line, the MGX can connect directly to your PLC. This makes for centralized control and easy changes in product specifications and gauge settings. With built-in Ethernet ports, it's as simple as plug in and go.
- **Monitor thickness measurement in real-time:** Our on-screen data visualizations are purpose-built for operator ease. Monitor real-time thicknesses and run charts of multiple locations across your product. Automatically connect to your existing systems to set thickness targets and key thresholds. Be immediately notified by on-screen alarms when issues arise.
- **Keep an eye on your lines without leaving your desk:** You'll have full access to real-time measurement data, as well as the ability to track trends over run-time and perform data file downloads. All of this with ironclad security - your data is only accessible via your facilities local network.
- **Ease of use and stress-free maintenance:** The belt-driven, single actuator includes built-in centering for in-field positioning. Calibration, using the NIST-traceable master calibration block, only needs to be done once every 3 months. The laser sensors' modular design and quick electrical disconnects means, when needed, they are quickly and easily replaced. The belt-drive actuator design is familiar making it easy to maintain.
- **Monitor and reduce dirt accumulation:** When the sensors get dirty, our alert system makes sure you're immediately notified. Dirty sensors are easily retracted and quickly cleaned with no disruption to your production line. The actuator's overhead position, located away from materials, reduces the risk of particulates entering the drive system and helps eliminate failure points.

TECHNICAL SPECIFICATIONS

THICKNESS MEASUREMENTS DETAILS

Resolution	0.5 μm	[0.00002 in]
Accuracy (typical)	1 μm	[0.00004 in]
Stroke	254 mm	[10 in]
Scanning Speed	150 mm/sec	[6 in/sec]
Thickness Range	0 to 10 mm	[0 to 0.4 in]
Measurement Frequency	1 to 5 kHz	

SUPPLY REQUIREMENTS

Power	2A @ 110V/60 Hz 1A @ 240V/50 Hz
-------	---------------------------------

WEIGHT

Complete Assembly	10 kg	[22 lbs]
-------------------	-------	----------

PHYSICAL DIMENSIONS

Main Housing	355x457x254 mm [14x18x10 in]
--------------	------------------------------

ENVIRONMENTAL REQUIREMENTS

Operating Temperature	10 °C to 50 °C	[50 °F to 120 °F]
-----------------------	----------------	-------------------

Humidity	< 90%
----------	-------



OPTIONAL CONFIGURATIONS AND PART NUMBERS

Item	Part Number	Description
1	10041300	MGX - Standard Build
2	10041550	MGX - Extended Range (0-16 mm)


WHAT’S INSIDE THE BOX?

The bench top system is ready to run out-of-the-box. It includes two laser sensors, c-frame, scanning belt drive system, NIST traceable calibration reference block, and a built-in touchscreen and measurement tray.


MGX

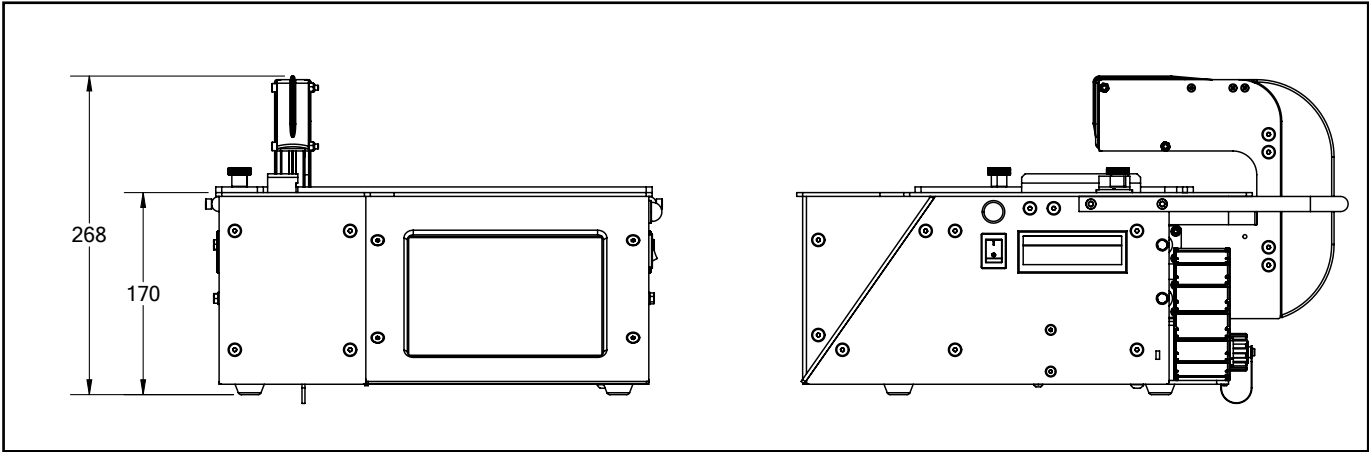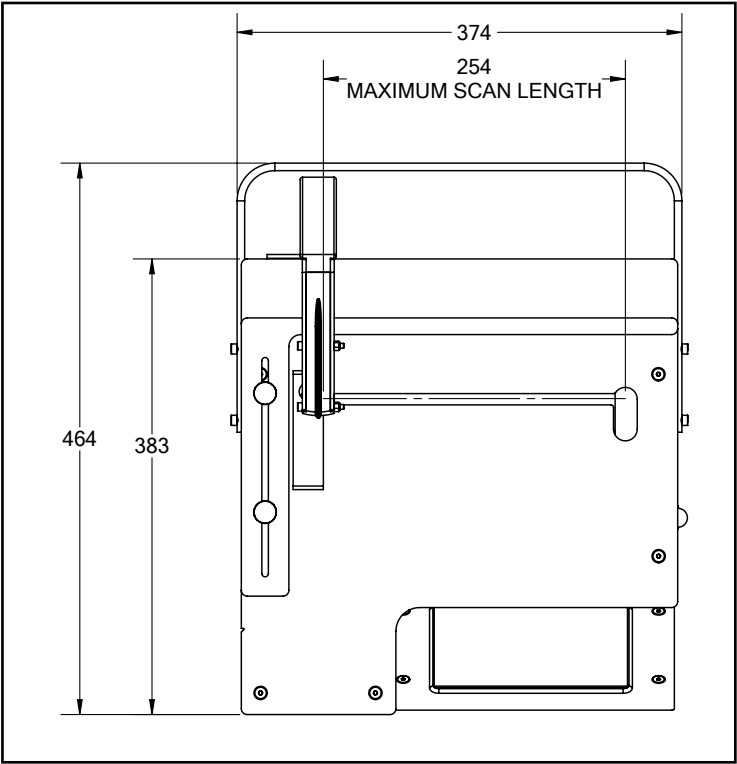


MGX

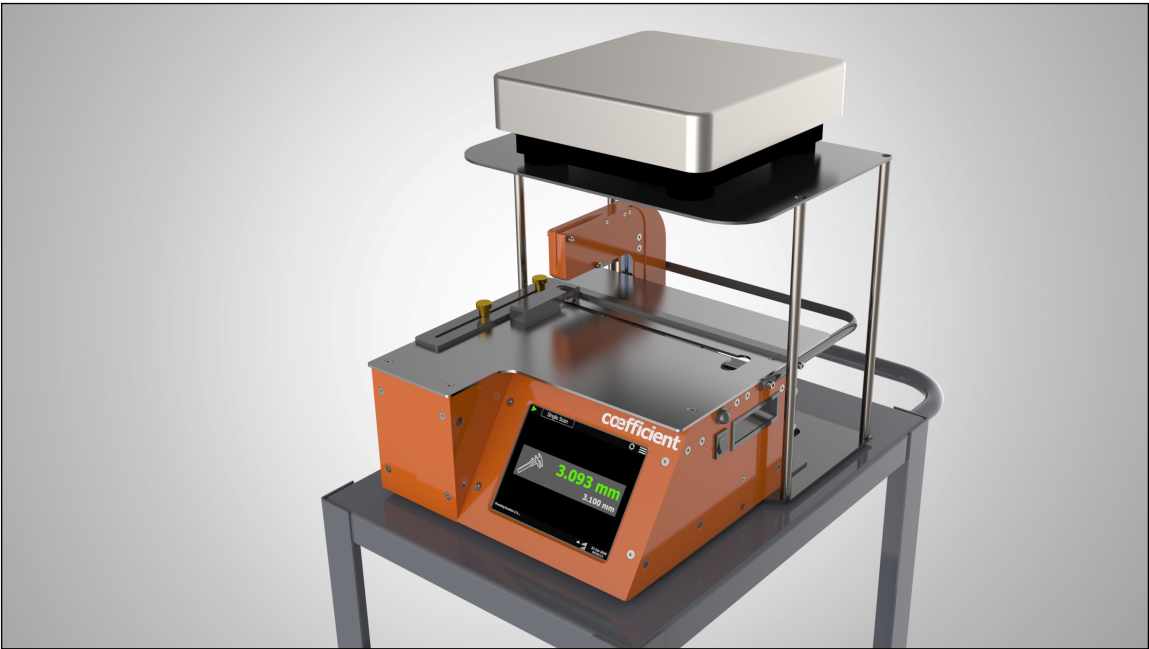


Controls and Displays Purpose-Built for Operator Ease

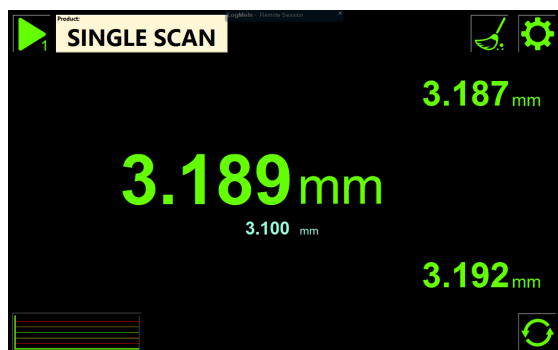


Large Numerical Display.

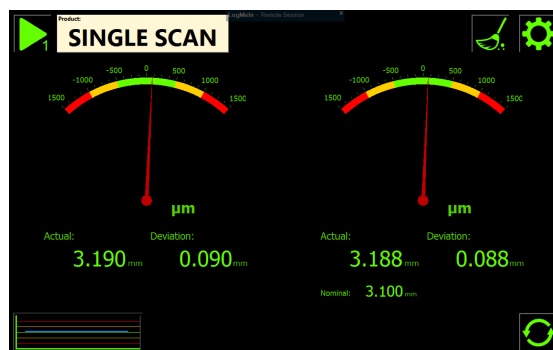

Needle Gauge Location Showing Left-Right

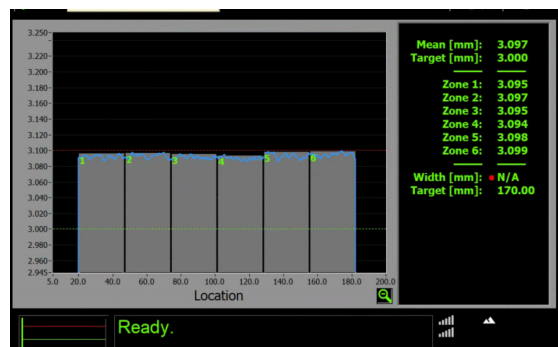

View Thickness of Sample in a Range of Zones

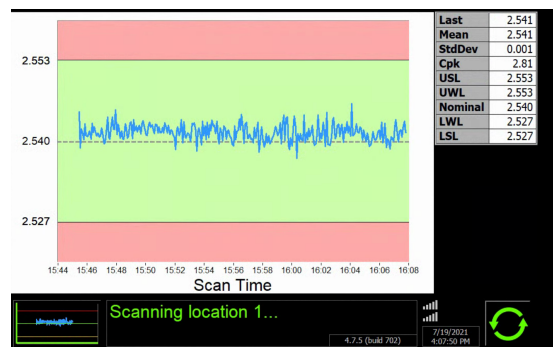

See Sample Thickness Over Time.

ORDER YOURS TODAY!

Please contact info@mategauge.com and refer to Part No. 10041300

For an extended range build (0-16 mm), refer to Part No. 10041550

THE MATE GAUGE PRODUCT FAMILY


Not sure which Mate Gauge is right for you? Check out our other options.

STANDARD OPTIONS



MG1: Compact and lightweight inline gauge. Provides thickness measurement solutions that fit your floorspace and your budget.

[Learn More](#)

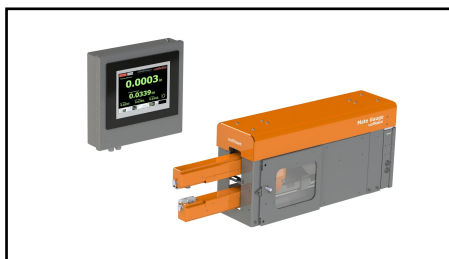


MG3: Our flagship gauge. Tolerant of dirt and temperature swings, the MG3 provides rich data for your inline needs.

[Learn More](#)

CUSTOM OPTIONS

Have special requirements? No worries. Our team of designers thrives on creating custom solutions to fit every situation.

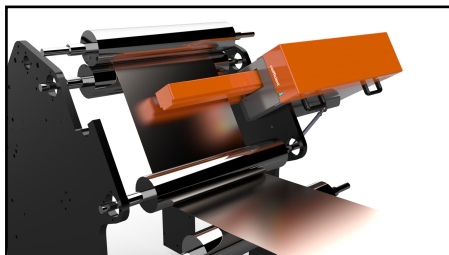


MG-CLS: Laser thickness measuring for cast lead strips. Improves lead strip thickness control with automatic measurement.

[Learn More](#)



MG Edge: Powerful features with a compact design. The MG Edge provides near-edge thickness measurement for moving strips.

[Learn More](#)

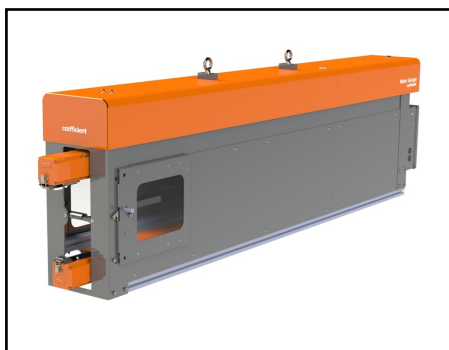

MGS: No area is out of reach. A large scale thickness scanner designed for wide continuous strip materials.

[Learn More](#)

Mate Gauge
132-105 Schneider Road
Ottawa, Ontario, Canada

Phone: +1 (613) 287-0171
sales@mategauge.com
www.mategauge.com